


Ω

B

А

F

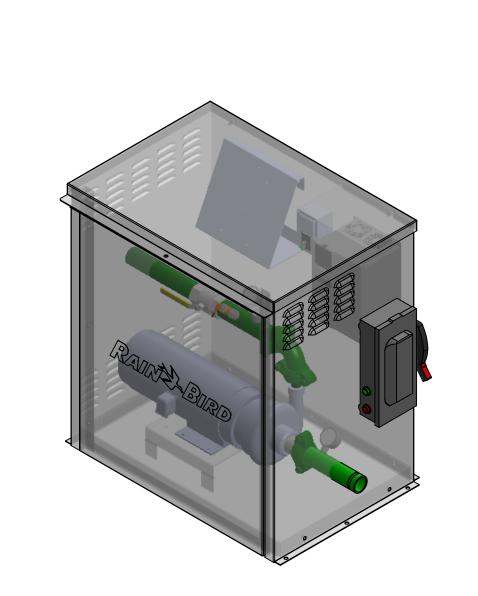

8

Ω

- CLOSE-COUPLED. HORIZONTAL END-SUCTION PUMP WITH BRONZE IMPELLER AND TYPE 21 BUNA-N MECHANICAL SEAL FOR LONG PUMP LIFE.
- 2. NEMA-STANDARD FRAME, PREMIUM EFFICIENCY MOTOR WITH TOTALLY-ENCLOSED, FAN-COOLED CASE FOR SUPERIOR ENVIRONMENTAL PROTECTION.
- 3. ENERGY SAVING VARIABLE FREQUENCY DRIVE FEATURING INNOVATIVE RAIN BIRD PROGRAMMING; STATION WILL BE CONTROLLED VIA RELAY START INCLUDED STANDARD OR OPTIONAL FLOW START KIT.
- 4. 0-250 PSI STAINLESS STEEL PRESSURE TRANSDUCER REGULATES PRESSURE AT A USER-DEFINED SETPOINT WHILE IRRIGATING. 2 1/2" LIQUID GLYCERIN-FILLED SUCTION AND DISCHARGE PRESSURE GAUGES ARE STANDARD.
- 5. INCLUDES JUNCTION BOX WITH AUTO-OFF-MANUAL SWITCH AND 24 VAC PUMP START RELAY STANDARD; 12 OR 6 VDC PUMP START RELAY OPTIONS ARE AVAILABLE.
- 6. FUSED ELECTRICAL DISCONNECT INCLUDES EXTERNAL RUN AND FAULT INDICATOR LIGHTS AND DISCONNECT HANDLE FOR ISOLATING POWER TO THE STATION.
- 7. STATION IS BUILT USING ROBUST SCHEDULE 40 PIPING WITH HIGHLY DURABLE POLYESTER POWDER-COATING INSIDE AND OUT, AND GROOVED CONNECTIONS FOR EASY MAINTENANCE AND SERVICEABILITY.
- FULL-PORT STAINLESS STEEL DISCHARGE ISOLATION VALVE STANDARD.
- 9. PUMP STATION IS CONTAINED IN A MARINE-GRADE ALUMINUM DECK AND ENCLOSURE WITH LOCKABLE HINGED LID, AND REMOVABLE FRONT PANEL FOR EASE OF MAINTENANCE.
- 10. EACH PUMP STATION IS FACTORY TESTED UNDER DYNAMIC CONDITIONS BEFORE SHIPPING.

NLESS OTHERWISE SPECIFIED:		DRAWN	DATE		PROJ. NAME				1
		IB DESIGNED IB	05/07/2019 DATE 05/07/2019	RAIN BIRD. SYSTEMS MEG. DIV.	N/A				
LED E Ø	= ± 1/32"	SCALE 1:12	000112010	TUCSON, ARIZONA	PROJ. NO.	N/A			1''
ΕØ	= ± 1/32	DO NOT SCALE DRAWING					DRAWING NUMBER		
ULAR	= ± 2°	LAST MODIFIED IN VERSION		CLP, 3HP			STANDARD	-	
×		SolidWorks 2017					PART NO.	REV.	1
IMAL X RANCE XX	= ± .060" DWG SYMBOLS x = ± .010" PER ANSI		YMBOLS ANSI	CLP03CAC			SHEET 3 OF 3		1
				<u></u>			1		-