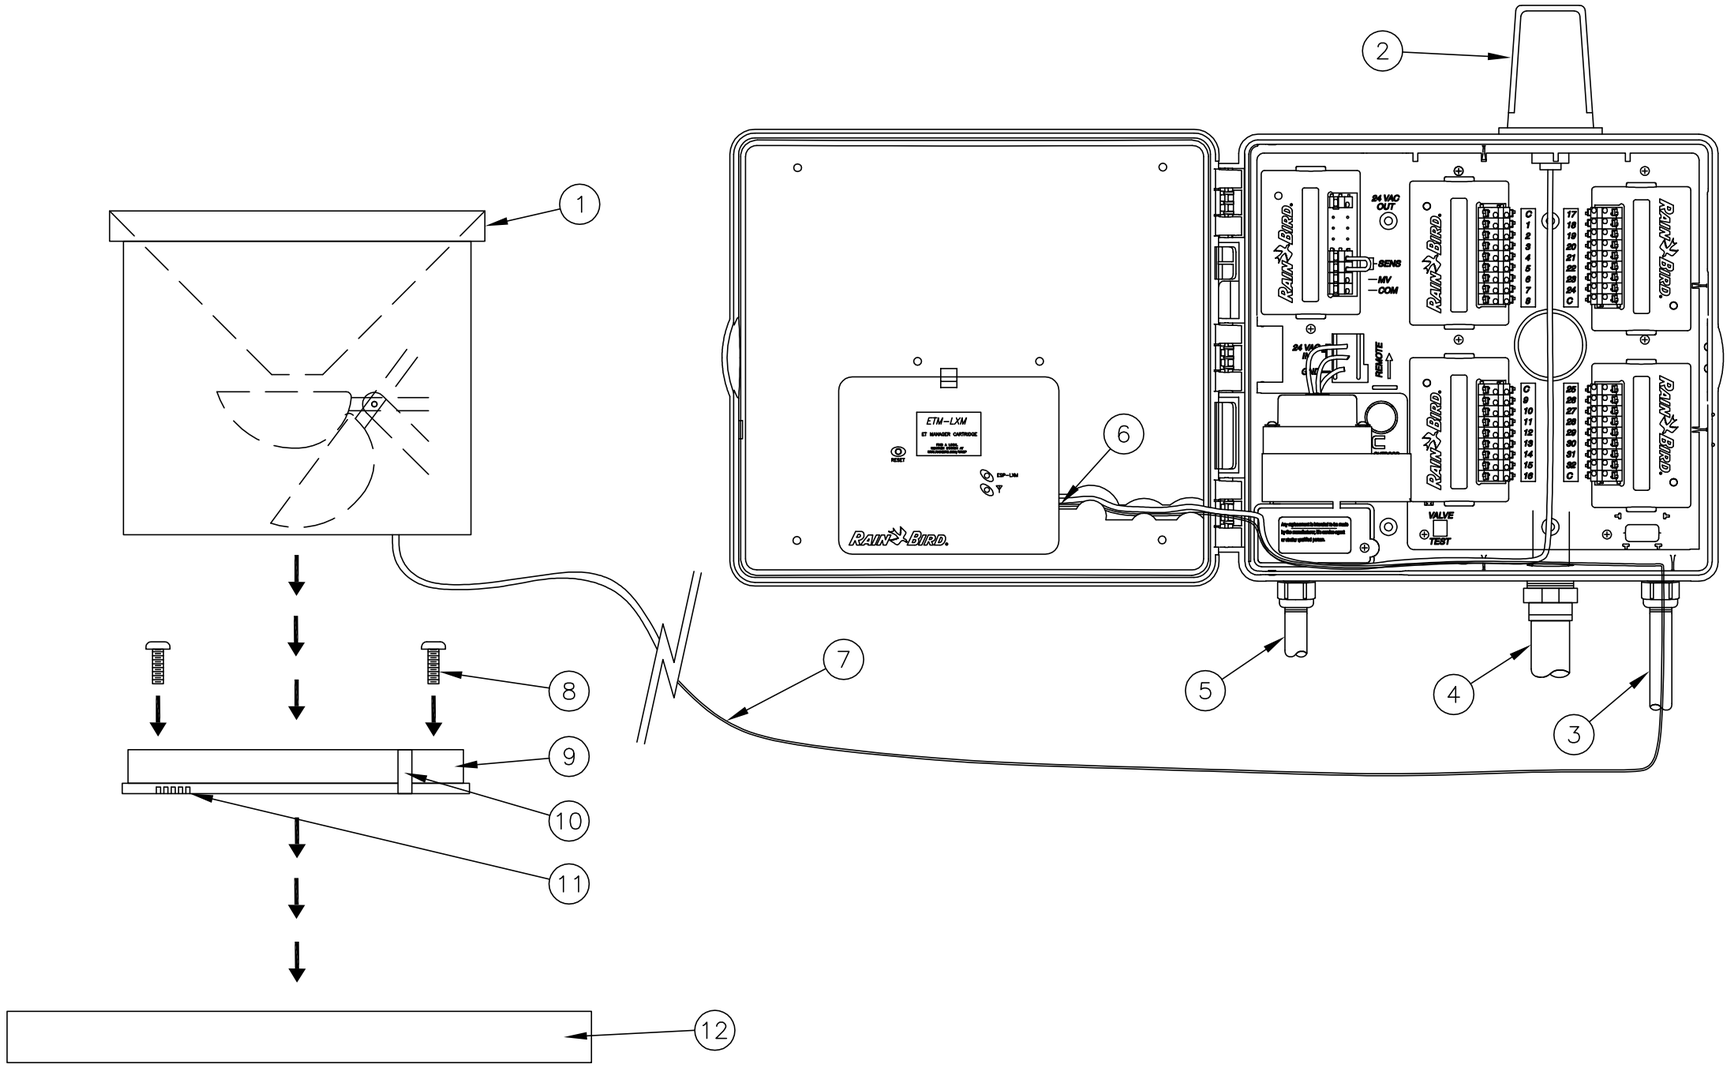

1. RAIN BIRD ET MANAGER TIPPING RAIN GAUGE: RAIN BIRD ETM–RG (DIMENSIONS 3 5/16" H X 1 15/16" W X 3 7/8" D)
2. RAIN BIRD ESP–LX MODULAR CONTROLLER WITH ET MANAGER CARTRIDGE
3. 1–INCH PVC SCH 40 CONDUIT AND FITTINGS
4. 1 ½–INCH PVC SCH 40 CONDUIT AND FITTINGS
5. 1–INCH PVC SCH 40 CONDUIT TO POWER SUPPLY
6. CONNECT TIPPING RAIN GAUGE TO ET MANAGER CARTRIDGE
7. 30' LENGTH OF WIRE TO TIPPING RAIN GAUGE (INCLUDED). CUT TO REQUIRED LENGTH. IF ADDITIONAL DISTANCE IS REQUIRED THE RAIN GAUGE CAN HAVE A MAXIMUM CABLE RUN OF 500'. USE 18 AWG AS A MINIMUM WIRE SIZE FOR ADDITIONAL CABLE.
8. MOUNTING SCREWS (NOT INCLUDED)
9. MOUNTING PLATE WITH 2 MOUNTING HOLES
10. WIRE NOTCH
11. RAIN DRAINAGE HOLES
12. LEVEL SURFACE OR BRACKET

D

Tipping Rain Gauge with ET Manager Cartridge

N.T.S.

2–04–09

Tipping Rain Gauge–ETM–LXM.dwg