

IMB-Series Basket Strainers

Designed for inorganic contaminants removal



Rain Bird IMB-Series Basket Strainers are a low-cost filter solution designed to be used for the removal of inorganic contaminants. IMB Strainers trap gross contaminants and are able to withstand a substantial amount of loading without failure. When used as a secondary filter the basket strainer is intended to capture contaminants that may enter the system as a result of a pipeline break or system malfunction.

Applications

- Removal of sand, rock, grit and other inorganic contaminants to protect drip and microirrigation systems with fine mesh filtration down to 200 mesh (75 microns)
- 80 psi standard operating pressure (high pressure systems available)
- Flow ranges from 110 gpm and up

- Can be used as a primary filter in specific applications
- Can be used as a secondary filter to a sand media filter, centrifugal separator or other primary filtration system

Advantages

- Rugged, field changeable, washable and replaceable polypropylene filter mesh sock available in 80, 100, 150, and 200 mesh
 Easy-entry lid closure
- Available in welded carbon steel
- Available in weided carbon steel
 3M Scotchkote[®] 134 fusion bonded epoxy
- 3M Scotchkote[®] 134 fusion bonded epoxy coating on interior surfaces
- Exterior of housing is coated with UV stabilized polyester powder coat for longer product life and greater protection from the environment

Standard assembly includes:

- Carbon steel housing
- Easy-entry lid closure
- 3M Scotchkote[®] 134 fusion bonded epoxy coating on interior surfaces
- Polyester powder coating on exterior surfaces
- Internal stainless steel basket with field replaceable filter mesh
- 3-way valve
- Pressure gauge
- Tubing with fittings
- Drain valve

Available options:

- ASME code
- High pressure
- Grooved or flanged mainline connections
- Available in purple for reclaim water applications


INDUSTRIAL & MUNICIPAL

INDUSTRIAL • MUNICIPAL

IBS-Series Filter Specifications

	Maximum Flow		Filtration Surface Area	Maximum Pressure	Inlet/Outlet	Dimensions				
Model	gpm	m³/hr	(total sq ft)	(psi)	(in)	А	В	С	D	Е
IMB-S2	110	25	0.44	150 psi	2"	13 5/8"	3 1/8"	4 3/4"	11 5/8"	11"
IMB-S3	250	57	1.01	150 psi	3"	18 1/8"	5 1/4"	6 1/4"	12 1/2"	13"
IMB-S4	355	81	1.01	150 psi	4"	18 1/8"	5 1/4"	6 1/4"	12 1/2"	13"
IMB-S6	950	216	2.96	80 psi	6"	30 5/8"	8 1/4"	14 1/4"	18 3/4"	15 7/8"
IMB-S8	1250	284	2.57	80 psi	8"	31 5/8"	10 3/4"	12 1/4"	20 3/4"	18 1/8"
IMB-S10	1875	426	5.59	80 psi	10"	41 7/8"	15"	16 1/2"	24"	19 3/4"

Contact Rain Bird for drawings or visit industrial.rainbird.com to download.

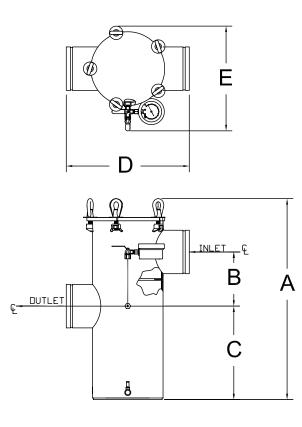

Rain Bird Corporation

6991 E. Southpoint Road Tucson, AZ 85756 Phone: (520) 741-6523 Fax: (520) 806-5678

The Intelligent Use of Water[™]

Rain Bird Corporation 970 West Sierra Madre Avenue Azusa, CA 91702 **Rain Bird International, Inc.** 1000 West Sierra Madre Ave. Azusa, CA 91702

www.rainbird.com