

XFCV Dripline with Heavy-Duty Check Valve

RAIN BIRD

8 ft. OF HOLD BACK

Water is held back 8 ft thanks to Rain Bird's 3.5 psi check valve



4.5 ft. OF HOLD BACK

Only 4.5 feet of water is held back with 2 psi check valves





Rain Bird's patent-pending check valve technology keeps the dripline charged even with extreme elevation changes



Elevated Performance

Keeps dripline charged with water even with elevation changes to 8 feet

Greater Flexibility

Rain Bird's proprietary blend provides industry leading flexibility allowing for tighter turns with fewer elbows for fast and easy installation

Conserves Water

Prevents puddling and water loss at the low point of the dripline



Contains at least 20% post consumer recycled polyethylene which qualifies for LEED credit 4.2



XFCV Dripline With Heavy-Duty Check Valve

Rain Bird® XFCV Dripline with Heavy-Duty Check Valve for onsurface applications adds a valuable member to the XF Series family of Rain Bird Landscape Drip products. Rain Bird's patent-pending check valve is the most effective dripline in the industry addressing applications where elevation changes exist.

For more information on XFCV, visit: www.rainbird.com/dripline


XFCV Dripline Models

- XFCV0612100
- XFCV0912100
- XFCV0612250
- XFCV0912250
- XFCV0612500
- XFCV0912500
- XFCV0618100
- XFCV0918100
- XFCV0618250
- XFCV0918250
- XFCV0618500
- XFCV0918500



Rain Bird's patent-pending check valve is the most effective dripline in the industry addressing applications where elevation changes exist. With the ability to keep the dripline charged in elevation changes to 8 feet, Rain Bird's XFCV can be used where no other dripline will work; keeping water in the dripline at all times helps for better uniformity of irrigating the plants throughout the entire zone.

The check valve also helps to prevent over-watering at the low-point in the zone, avoiding puddling from water draining from the dripline.

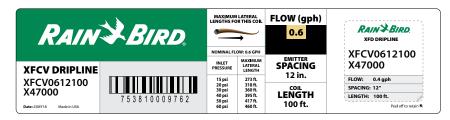

How to Specify

XFCV 09 18 500 Coil Length (500 Feet) Emitter Spacing (18" Inches) Flow Rate (0.9 GPH)

New XFCV Dripline Coil Labels

- Easier to read
- Useful job site information
- Peel off inset label to place in valve box or controller for future tubing identification



New Product Features

- Easier to read laser etched information on the tube
- Round emitter holes
- Colored stripes designate flow rate





Rain Bird's Professional Customer Satisfaction Policy

XF Series Dripline offers five (5) years on product workmanship and seven (7) years on environmental stress cracking.

Rain Bird Corporation

970 West Sierra Madre Avenue Azusa, CA 91702 Phone: (626) 812-3400 Fax: (626) 812-3411

Rain Bird International, Inc.

1000 West Sierra Madre Avenue Azusa, CA 91702 Phone: (626) 963-9311 Fax: (626) 852-7343

Rain Bird Corporation

6991 East Southpoint Road Tucson, AZ 85756 Phone: (520) 741-6100 Fax: (520) 741-6522

Rain Bird Technical Services (800) RAINBIRD (U.S. and Canada)

www.rainbird.com

Registered Trademark of Rain Bird Corporation
 2020 Rain Bird Corporation 04/20