

Centrifugal Sand Separators

Remove contaminants to minimize required maintenance and increase efficiency

Features and Benefits Include:

- No moving parts.
- 150 PSI carbon steel construction with threaded or flanged inlet/outlet connections.
- Polyester powder coated for long service life.
- Non-ASME code standard construction (ASME code construction available optionally).
- Capacities of 4 to 8300 gpm.
- Simple installation (no electrical required).
- Efficient pre-filter to reduce sand load on downstream components.
- Cost effective.

Pumping water from wells or other sources with excessive amounts of sand, silt, or other abrasive grit particles can lead to the premature degradation of irrigation system components. These contaminants can reduce the efficiency of the irrigation system equipment by plugging and clogging sprinklers, drip emitters, valves, and spray nozzles. Repairing these components costs time and money in replacement parts, downtime and productivity. Rain Bird Centrifugal Sand Separators are designed to separate abrasive particles before they can enter the irrigation system, keeping equipment clean and clear of debris, which minimizes the amount of maintenance required and increases operational efficiency. These filters are designed and manufactured to exacting standards, providing many years of optimal performance.

Rain Bird centrifugal separators are designed for easy installation, minimal maintenance, and reliable operation. The separator removes sand and particles that are heavier than water (materials with a specific gravity of 2 or greater)

before these particles can damage your system. Note: Silt, due to its mass (or lack thereof) would not be able to be filtered.

Liquids and solids enter the unit and begin traveling in a circular flow. This centrifugal action throws heavier particulates towards the filter walls and eventually downward in a spiral motion to the separation chamber. The particulates collect in the separation chamber and are purged manually from the system. The filtered water is then drawn to the separator's vortex and through the outlet.

An optional automatic purge controller and valve can be used on all applications to automate the purge process, which eliminates the need for manual flushing. Small vertical design separators may be wall mounted or supported by the system piping.

Clean water is drawn out through the separator's vortex action


Liquid / solid mix enters unit tangentially inducing centrifugal action

Centrifugal Separator Theory of Operation

Solids drop into the collection chamber

Centrifugal action moves heavier particles to sides of the separator


Solids are purged as required from the collection chamber

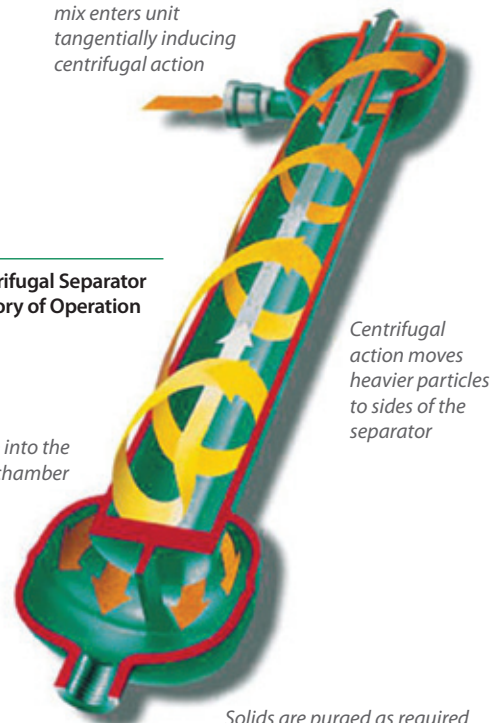

Centrifugal Sand Separators Performance Data



Dimensions

Model Number	A	B	C	D	E	F	G	H	I	J	K
ACS-R-40LA-A	48 1/2"	46 1/2"	46 1/2"	16 11/16"	16"	7 1/2"	19"	4"	6 5/8"	12"	80"
ACS-R-60LA-A	63"	59 1/2"	60 3/8"	20 1/2"	20 3/4"	10 1/2"	22"	5 1/4"	10 3/4"	16"	106 1/4"
ACS-R-80LA-A	71"	65"	66"	21 3/4"	22 5/8"	12"	24 1/2"	5 5/8"	12 3/4"	18"	114"
ACS-R-100LA-A	78"	71"	72 3/4"	21"	24 1/2"	13"	29"	7"	16"	22"	123 1/2"
ACS-R-120LA-A	102"	75 1/4"	76 1/2"	23 3/4"	26 5/8"	14 1/4"	32"	8 1/8"	18"	26"	139"
ACS-R-140LA-A	102 1/2"	85 3/8"	86 5/8"	24 1/2"	27 3/4"	12"	33 1/2"	9"	20"	28"	152 1/2"
ACS-R-160LA-A	108"	89 1/4"	90"	24 3/8"	29"	12"	33 1/2"	9"	24"	30"	160"
ACS-R-180LA-A	118 1/2"	98 1/4"	100 1/4"	27"	33 5/8"	15"	34 1/2"	11"	28"	36"	177"

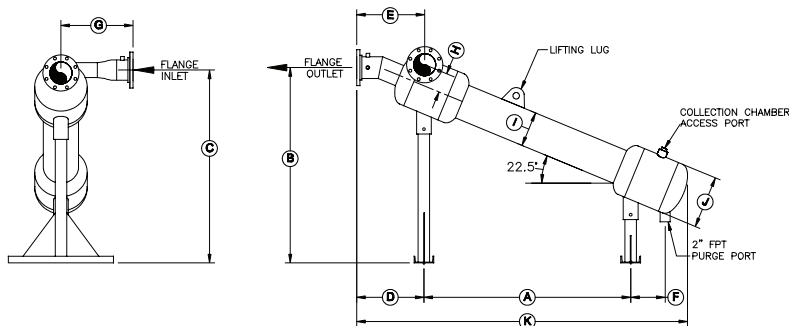

Dimensions

Model Number	A	B	C	D
VCS-R-5V-A	21 1/2"	6"	2 3/8"	2 1/2"
VCS-R-7V-A	21 1/2"	6"	2 3/8"	2 1/2"
VCS-R-10V-A	30 1/2"	6"	3 1/2"	2 3/4"
VCS-R-12V-A	30 1/2"	6"	3 1/2"	3"
VCS-R-15V-A	30 1/2"	6"	3 1/2"	3 1/8"
VCS-R-20V-A	38"	8"	4 1/2"	3 5/8"
VCS-R-25V-A	43 3/4"	10"	4 1/2"	4 1/2"
VCS-R-30V-A	47 1/2"	10"	5 9/16"	5"
VCS-R-40V-A	49"	12"	6 5/8"	6"

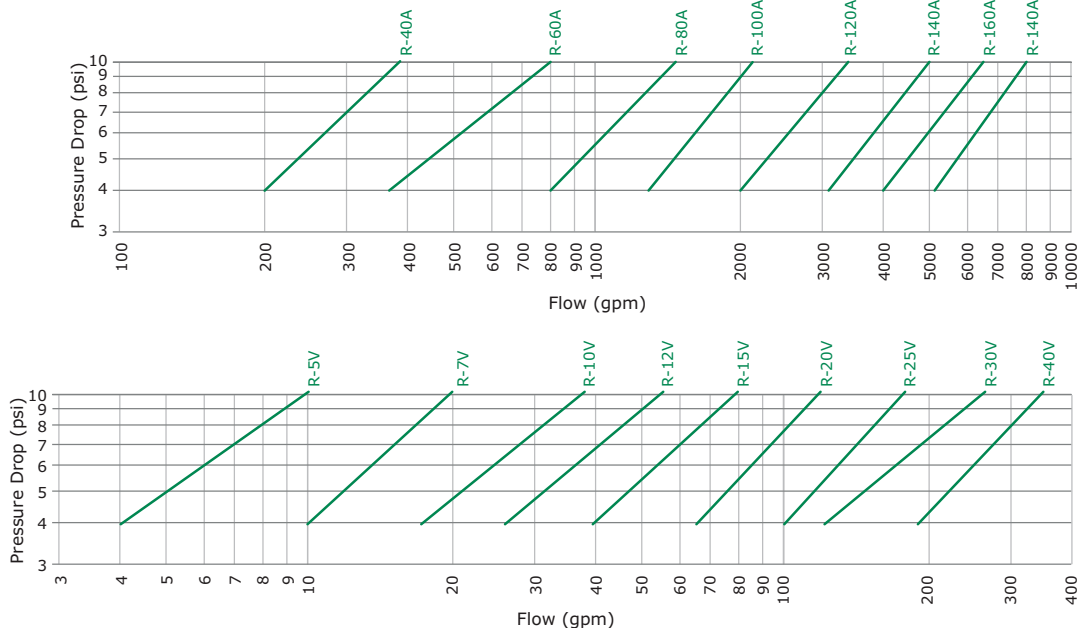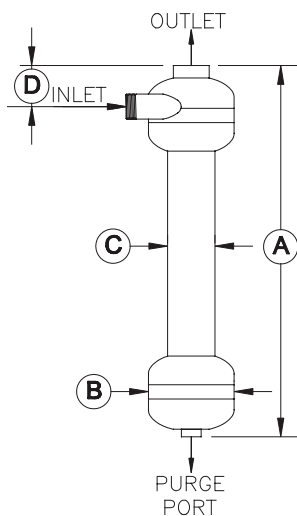

Auto Purge Options:

- 1" controller and auto purge valve for 1" models
- 2" controller and auto purge valve for 2" models

Contact Rain Bird for drawings or visit www.rainbird.com to download.

Rain Bird Corporation

6991 E. Southpoint Road
Tucson, AZ 85756
Phone: (520) 741-6100
Fax: (520) 741-6522

Rain Bird Technical Services

(800) RAINBIRD (1-800-724-6247)
(U.S. and Canada)

Rain Bird Corporation

970 West Sierra Madre Avenue
Azusa, CA 91702
Phone: (626) 812-3400
Fax: (626) 812-3411

Specification Hotline

800-458-3005 (U.S. and Canada)

Rain Bird International, Inc.

1000 West Sierra Madre Ave.
Azusa, CA 91702
Phone: (626) 963-9311
Fax: (626) 852-7343

The Intelligent Use of Water™

www.rainbird.com