


- ① PVC DRIP MANIFOLD FROM RAIN BIRD CONTROL ZONE VALVE KIT (SIZED TO MEET LATERAL FLOW DEMAND)
- ② BARB X MALE FITTING:  
RAIN BIRD XFF-MA FITTING (TYPICAL)
- ③ PVC SUPPLY HEADER
- ④ PVC SCH 40 TEE OR EL (TYPICAL)
- ⑤ ON-SURFACE DRIPLINE:  
RAIN BIRD XF SERIES DRIPLINE (TYPICAL)  
POTABLE: XFD DRIPLINE  
NON-POTABLE: XFDP DRIPLINE
- ⑥ FLUSH POINT: SEE RAIN BIRD XFD DETAILS FOR FLUSH POINT INSTALLATION
- ⑦ PVC FLUSH HEADER

**NOTES:**

1. DISTANCE BETWEEN LATERAL ROWS AND EMITTER SPACING TO BE BASED ON SOIL TYPE, PLANT MATERIALS AND CHANGES IN ELEVATION. DISTANCE BETWEEN LATERAL ROWS FOR BOTTOM 1/3 OF SLOPE TO BE SPACED GREATER THAN OPTIMAL ROW DISTANCE. SEE RAIN BIRD XFD DRIPLINE INSTALLATION GUIDE FOR SUGGESTED SPACING.
2. LENGTH OF LONGEST DRIPLINE LATERAL SHOULD NOT EXCEED THE MAXIMUM LENGTH SHOWN IN THE ACCOMPANYING TABLE.
3. WHEN ELEVATION CHANGE EXCEEDS 8 FEET IT IS RECOMMENDED THAT A NEW DRIPLINE ZONE BE CREATED.
4. WHEN USING 17MM INSERT FITTINGS WITH DESIGN PRESSURE OVER 50PSI, IT IS RECOMMENDED THAT STAINLESS STEEL CLAMPS BE INSTALLED ON EACH FITTING.

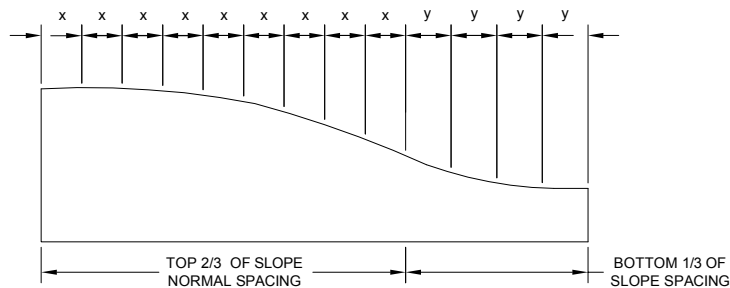

- x = DISTANCE BETWEEN ROWS OF DRIP LATERALS AS DETERMINED BY PLANT AND SOIL TYPE. SEE NOTE 1.  
 y = INCREASED DISTANCE BETWEEN ROWS OF DRIP LATERALS AS DETERMINED BY PLANT AND SOIL TYPE. SEE NOTE 1.

XFD Dripline Maximum Lateral Lengths (Feet)						
Inlet Pressure psi	12" Spacing		18" Spacing		24" Spacing	
	Nominal Flow (gph)		Nominal Flow (gph)		Nominal Flow (gph)	
	0.6	0.9	0.6	0.9	0.6	0.9
15	273	155	314	250	424	322
20	318	169	353	294	508	368
30	360	230	413	350	586	414
40	395	255	465	402	652	474
50	417	285	528	420	720	488
60	460	290	596	455	780	514



## XFD ON-SURFACE DRIPLINE SLOPED LAYOUT

12-18-2012