



**XLR SERIES WATER JETS**

**RAIN  BIRD®**

# The World's Most Advanced Long-Range Rotor.

For many applications, the ability to quickly and efficiently water large areas with just a few long-range rotors can make a big impact on the bottom line. Saving water, time and money—that's what the Rain Bird® XLR Series is all about. Built to the highest quality standards and loaded with industry-leading water- and cost-saving innovations, Rain Bird XLR Series Water Jets outperform and outlast competing long-range impact rotors.

## ► *Deflector Kit (standard) XLRDEFKIT*

### Intelligently Designed for Smart Savings

- The intelligent design of the deflector, barrel and nozzle require less water pressure to operate.
- Durable, lightweight materials require less force to initiate or change motion.

### XLR Nozzles (Sold Separately)

Choose from nine different nozzle sizes to get the throw range your job site needs. Each nozzle is manufactured with technical polymers, with a unique shape that minimizes pressure loss while maximizing throw.






► *Jet-Breaker Kit (optional) XLRJETKIT and Brake Kit (standard) XLRBRKKIT*

**Never Waste a Drop**


With a powerful throw and a dedicated focus on even water distribution, XLR Water Jets eliminate overwatering and runoff while maximizing your water efficiency. A self-adjusting automatic brake system ensures your rotors maintain a constant rotation speed while a dynamic jet-breaker corrects uneven distribution that's common in low-pressure settings.



*Low pressure water distribution profile*

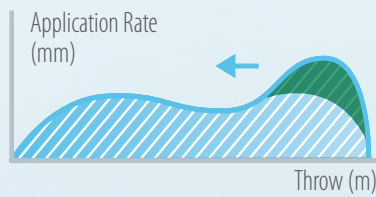

*Improved distribution uniformity with Dynamic Jet-Breaker in low pressure condition and Solid-Set systems*

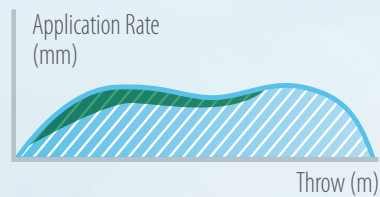

# Build Your Perfect Water Jet.

With three models and a variety of available nozzles that allow you to modify throw range based on your water pressure and work site, XLR Series Water Jets have the capacity to adapt to your exact needs.




## XLR 24

- Fixed 24° Trajectory
- Nine Available Nozzles
- Throw Range of 28 m – 54 m
- Full- and Part-Circle (20° – 340°) in One Unit
- 2" Flange Inlet
- 1-Year Warranty



## XLR 44

- Fixed 44° Trajectory
- Nine Available Nozzles
- Throw Range of 26 m – 53 m
- Full- and Part-Circle (20° – 340°) in One Unit
- 2" Flange Inlet
- 1-Year Warranty

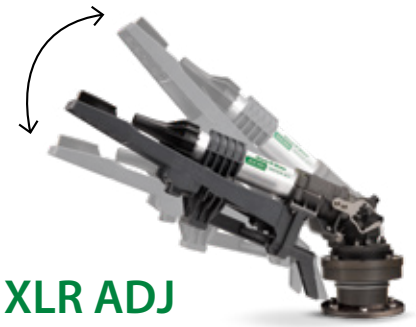

## XLR ADJ

- Adjustable trajectory from 15° to 45°
- Nine Available Nozzles
- Full- and Part-Circle (20° – 340°) in One Unit
- 2" Flange Inlet
- 1-Year Warranty

### XLR 24 Nozzle Throw Range | Fixed 24° Trajectory

Pressure bar	12 mm (0.47")		14 mm (0.55")		16 mm (0.63")		18 mm (0.71")		20 mm (0.79")		22 mm (0.87")		24 mm (0.94")		26 mm (1.02")		28 mm (1.10")	
	Flow m³/h	Radius m	Flow m³/h	Radius m	Flow m³/h	Radius m	Flow m³/h	Radius m	Flow m³/h	Radius m	Flow m³/h	Radius m	Flow m³/h	Radius m	Flow m³/h	Radius m	Flow m³/h	Radius m
2,0	7,8	24,2	10,6	26,5	13,8	28,9	17,5	29,1	21,7	29,4	26,1	29,8	31,1	30,2	36,7	30,6	42,3	30,9
2,5	8,7	26,8	11,9	29,0	15,4	31,3	19,5	32,5	24,2	33,8	29,2	34,4	34,7	35,1	41,0	35,8	47,3	36,5
3,0	9,6	29,4	13,0	31,6	16,9	33,7	21,4	35,9	26,5	38,2	31,9	39,1	38,0	39,9	44,9	41,0	51,8	42,1
3,5	10,3	31,2	14,1	33,3	18,2	35,5	23,1	37,9	28,7	40,4	34,5	41,6	41,1	42,9	48,5	44,4	56,0	45,9
4,0	11,1	32,9	15,1	35,1	19,5	37,3	24,7	39,9	30,7	42,5	36,9	44,2	43,9	45,8	51,8	47,8	59,8	49,7
4,5	11,7	33,9	16,0	36,2	20,7	38,6	26,2	41,2	32,5	43,9	39,1	45,7	46,6	47,6	55,0	49,8	63,5	52,0
5,0	12,4	34,8	16,8	37,3	21,8	39,8	27,6	42,5	34,3	45,2	41,2	47,3	49,1	49,3	58,0	51,8	66,9	54,3
5,5	13,0	35,7	17,7	38,4	22,9	41,1	29,0	43,8	35,9	46,5	43,2	48,7	51,5	50,9	60,8	53,5	70,2	56,2
6,0	13,5	36,6	18,4	39,5	23,9	42,4	30,3	45,0	37,5	47,7	45,2	50,1	53,8	52,5	63,5	55,3	73,3	58,1
6,5	14,1	37,4	19,2	40,4	24,9	43,3	31,5	46,0	39,1	48,7	47,0	51,2	56,0	53,7	66,1	56,5	76,3	59,3
7,0	14,6	38,2	19,9	41,2	25,8	44,2	32,7	46,9	40,6	49,7	48,8	52,3	58,1	54,9	68,6	57,7	79,2	60,6

The performance data were obtained under ideal testing conditions and may be adversely affected by wind and other factors. Pressure refers to pressure at nozzle. A lowered trajectory angle improves the irrigation efficiency in windy conditions. For every 3° drop of the trajectory angle the throw is reduced by approx. 3 to 4%.

### XLR 44 Nozzle Throw Range | Fixed 44° Trajectory

Pressure bar	12mm (0.47")			14mm (0.55")			16mm (0.63")			18mm (0.71")			20mm (0.79")			22mm (0.87")			24mm (0.94")			26 mm (1.02")			28 mm (1.10")		
	Flow m³/h	Radius m	Height m	Flow m³/h	Radius m	Height m	Flow m³/h	Radius m	Height m	Flow m³/h	Radius m	Height m	Flow m³/h	Radius m	Height m	Flow m³/h	Radius m	Height m	Flow m³/h	Radius m	Height m	Flow m³/h	Radius m	Height m	Flow m³/h	Radius m	Height m
3,0	9,6	26,1	11,9	13,0	28,5	12,1	16,9	31,0	12,3	21,4	33,5	12,5	26,5	35,9	12,7	31,9	37,2	12,9	38,0	38,5	13,1	44,9	39,7	13,3	51,8	41,0	13,4
3,5	10,3	27,7	13,1	14,1	30,3	13,4	18,2	33,0	13,7	23,1	35,6	14,0	28,7	38,2	14,4	34,5	39,7	14,6	41,1	41,1	14,9	48,5	42,6	15,1	56,0	44,0	15,3
4,0	11,1	29,3	14,3	15,1	32,1	14,7	19,5	34,9	15,1	24,7	37,8	15,6	30,7	40,6	16,0	36,9	42,2	16,3	43,9	43,8	16,6	51,8	45,5	17,0	59,8	47,1	17,3
4,5	11,7	30,4	15,1	16,0	33,4	15,6	20,7	36,3	16,1	26,2	39,3	16,7	32,5	42,2	17,2	39,1	43,9	17,6	46,6	45,6	18,1	55,0	47,3	18,5	63,5	49,0	18,9
5,0	12,4	31,5	15,9	16,8	34,6	16,5	21,8	37,7	17,1	27,6	40,8	17,8	34,3	43,9	18,4	41,2	45,7	19,0	49,1	47,4	19,5	58,0	49,2	20,0	66,9	51,0	20,5
5,5	13,0	32,4	16,4	17,7	35,6	17,2	22,9	38,7	17,9	29,0	41,9	18,6	35,9	45,1	19,4	43,2	46,9	20,0	51,5	48,7	20,6	60,8	50,5	21,2	70,2	52,3	21,8
6,0	13,5	33,3	17,0	18,4	36,5	17,8	23,9	39,8	18,7	30,3	43,0	19,5	37,5	46,3	20,3	45,2	48,1	21,0	53,8	50,0	21,7	63,5	51,8	22,3	73,3	53,6	23,0
6,5	14,1	33,9	17,4	19,2	37,2	18,3	24,9	40,5	19,2	31,5	43,8	20,1	39,1	47,1	21,0	47,0	49,0	21,8	56,0	50,9	22,5	66,1	52,7	23,3	76,3	54,6	24,1
7,0	14,6	34,5	17,9	19,9	37,8	18,8	25,8	41,2	19,8	32,7	44,6	20,7	40,6	48,0	21,7	48,8	49,9	22,5	58,1	51,8	23,4	68,6	53,7	24,2	79,2	55,6	25,1
7,5	15,1	34,8	18,1	20,6	38,2	19,1	26,7	41,7	20,2	33,8	45,1	21,2	42,0	48,5	22,2	50,5	50,4	23,1	60,1	52,4	24,0	71,0	54,3	24,9	82,0	56,3	25,8
8,0	15,6	35,2	18,4	21,3	38,7	19,5	27,6	42,1	20,6	34,9	45,5	21,6	43,4	49,0	22,7	52,2	51,0	23,6	62,1	53,0	24,6	73,3	55,0	25,5	84,6	57,0	26,4

The performance data were obtained under ideal testing conditions and may be adversely affected by wind and other factors. Pressure refers to pressure at nozzle. Radius = radius of throw in meters. Nozzle at 1,5 meters above ground level. Height = maximum stream height in meters above nozzle.

### XLR ADJ Nozzle Throw Range | Adjustable Trajectory

- For every 3° drop of the trajectory angle, the throw is reduced by approximately 3 to 4%.
- Use the XLR 24 Nozzle Throw Range Table for your pressure and nozzle diameter.



# Highly Adaptable for Any Environment.

Every work site is unique—from water pressure and topography to size, shape and requirements. The XLR Series Water Jets were built for easy customization. Regardless of your challenge, these rotors are always up to the task.

## IRRIGATION


Highly uniform distribution means you can effectively irrigate large areas without flooding or pooling in overwatered zones.

- Synthetic Turf
- Natural Turf
- Agriculture
- Log Pile Irrigation

## DUST CONTROL

Designed to quickly and evenly put down water, you can tame dust in a fraction of the time.

- Feed Yards
- Stables
- Mining
- Equestrian

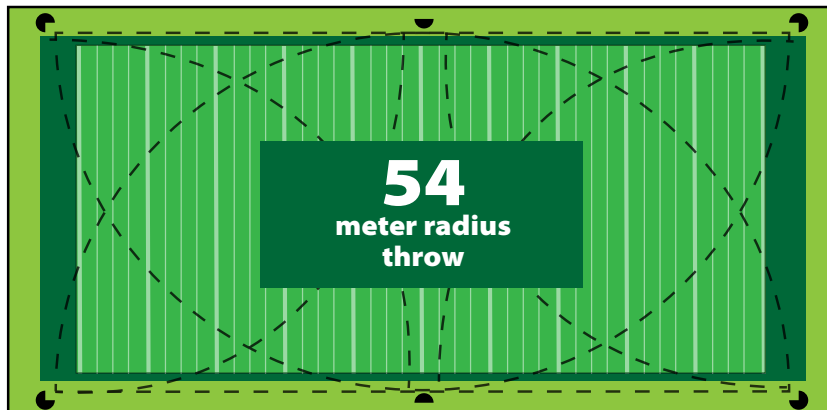

*Use multiple part-circles to cover large areas.*



## HOW TO SPECIFY

<u>XLR</u>	<u>44</u>	-	<u>XLRJETKIT</u>
MODEL	ANGLE		OPTIONAL FEATURE*
XLR	24		XLRJETKIT = Jet Breaker Kit
	44		
	ADJ		

\*Order Separately

## The Intelligent Use of Water.™

LEADERSHIP • EDUCATION • PARTNERSHIPS • PRODUCTS

---

At Rain Bird, we believe it is our responsibility to develop products and technologies that use water efficiently. Our commitment also extends to education, training and services for our industry and our communities.

The need to conserve water has never been greater. We want to do even more, and with your help, we can. Visit [www.rainbird.com](http://www.rainbird.com) for more information about The Intelligent Use of Water.™



### **Rain Bird Europe SNC**

240 rue René Descartes  
Le clamar Bât. A  
Zac du Parc de la Duranne  
13290 Aix-en-Provence – FRANCE  
Tel : (33) 4 42 24 44 61  
Fax : (33) 4 42 24 24 72  
[rbe@rainbird.fr](mailto:rbe@rainbird.fr) – [www.rainbird.fr](http://www.rainbird.fr)

### **Rain Bird France SNC**

240 rue René Descartes  
Le clamar Bât. A  
Zac du Parc de la Duranne  
13290 Aix-en-Provence – FRANCE  
Tel : (33) 4 42 24 44 61  
Fax : (33) 4 42 24 24 72  
[rbe@rainbird.fr](mailto:rbe@rainbird.fr) – [www.rainbird.fr](http://www.rainbird.fr)

### **Rain Bird Ibérica, S.A.**

c/ Valentin Beato 23, 2º izq fdo  
23037 Madrid  
ESPAÑA  
Tel: (34) 91 632 48 10  
Fax: (34) 91 632 46 45  
[rbib@rainbird.eu](mailto:rbib@rainbird.eu) – [www.rainbird.es](http://www.rainbird.es)  
[Portugal@rainbird.eu](mailto:Portugal@rainbird.eu) – [www.rainbird.pt](http://www.rainbird.pt)

### **Rain Bird Deutschland GmbH**

Königstraße 10c  
71083 Stuttgart  
DEUTSCHLAND  
Tel: +49 (0) 711 222 54 158  
Fax: +49 (0) 711 222 54 200  
[rbd@rainbird.eu](mailto:rbd@rainbird.eu)

### **Rain Bird Turkey**

Çamlık Mh. Diñç Sokak Sk. No.4 D:59-60  
34760 Ümraniye, İstanbul  
TÜRKİYE  
Tel: (90) 216 443 75 23  
Fax: (90) 216 461 74 52  
[rbt@rainbird.eu](mailto:rbt@rainbird.eu) – [www.rainbird.com.tr](http://www.rainbird.com.tr)

[rainbird.eu](http://rainbird.eu)