


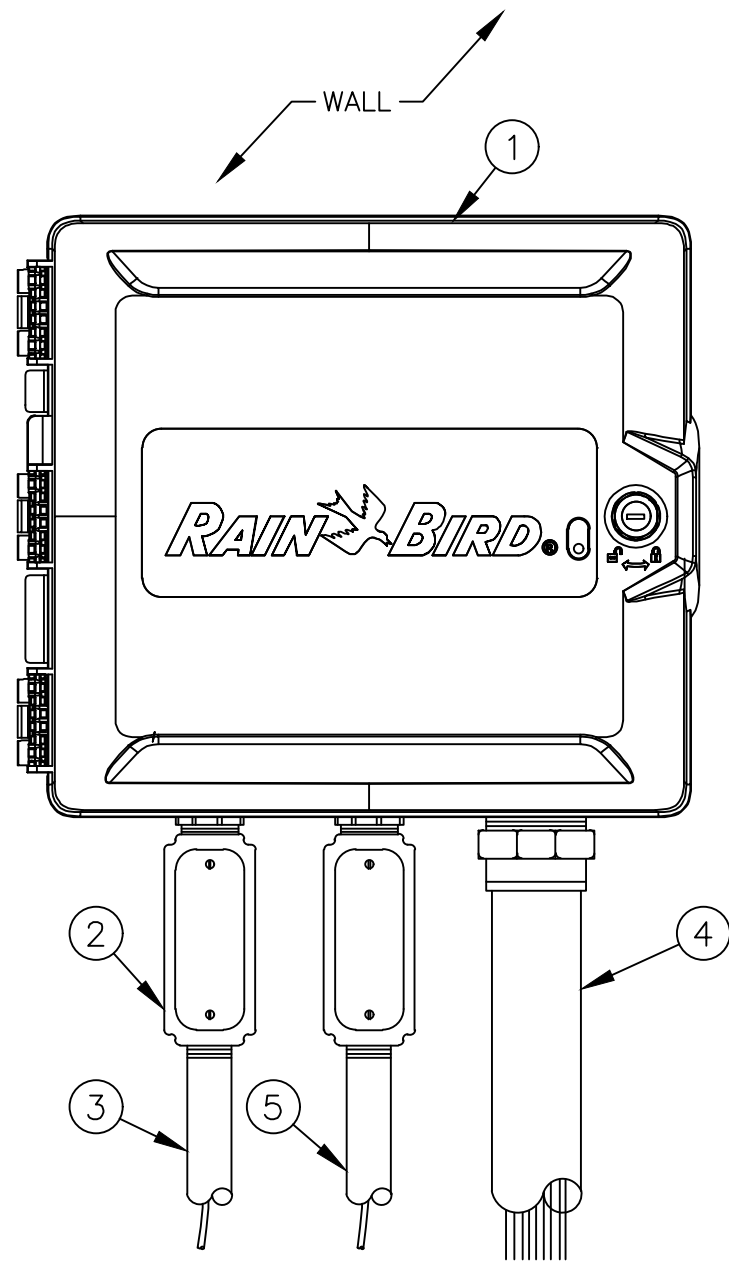


- ① TRADITIONAL WIRE CONTROLLER:
RAIN BIRD ESP-LXME2/PRO IN PLASTIC CABINET WITH WALL MOUNT.
INSTALL CONTROLLER AND CABINET ON WALL PER MANUFACTURER'S
RECOMMENDATIONS.
- ② JUNCTION BOX
- ③ 1-INCH CONDUIT AND FITTINGS FOR POWER SUPPLY WIRE
- ④ 2-INCH CONDUIT AND FITTINGS FOR CONTROL WIRES TO VALVES
- ⑤ 1-INCH OPTIONAL CONDUIT AND FITTINGS FOR IQ COMMUNICATION WIRE.

NOTES:

1. LXME2 CONTROLLER IS AVAILABLE IN TWO MODELS. THE LXME2
AND THE LXME2-PRO. REFER TO THE CHART BELOW FOR
DIFFERENCES BETWEEN THE TWO MODELS.
2. USE STEEL CONDUIT FOR ABOVE GRADE AND SCH 40 PVC
CONDUIT FOR BELOW GRADE CONDITIONS.
3. PROVIDE PROPER GROUNDING COMPONENTS TO ACHIEVE GROUND
RESISTANCE OF 10 OHMS OR LESS. IF CONTROLLER IS MOUNTED
INDOORS, USE POWER SUPPLY GROUND.

KEY SPECIFICATIONS

FEATURE MODEL						
	MAX PROGRAMS	MAX STATIONS	MASTER VALVES	SECOND MASTER VALVE OR PUMP START	FLOW SENSOR / FLOW ZONE	WEATHER SENSORS
LXME2	40	48	1	0	0	1
LXME2 PRO	40	48	1	1	1	1



ESP-LXME2/PRO CONTROLLER
N.T.S. IN PLASTIC CABINET

2021-12-08