


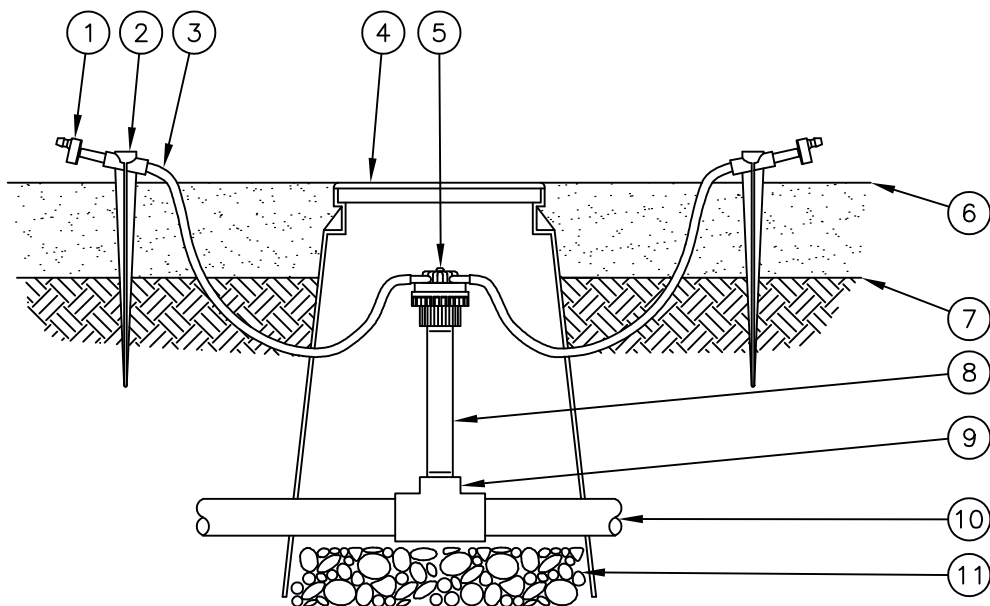

- ① SINGLE-OUTLET BARB INLET X BARB OUTLET EMITTER:
RAIN BIRD XERI-BUG OR PC MODULE EMITTER:
(1 OF 2 SHOWN, 6 POSSIBLE)
- ② UNIVERSAL 1/4" TUBING STAKE:
RAIN BIRD TS-025
(1 OF 2 SHOWN, 6 POSSIBLE)
- ③ 1/4" DISTRIBUTION TUBING:
RAIN BIRD XQ TUBING (LENGTH AS REQUIRED)
(1 OF 2 SHOWN, 6 POSSIBLE)
- ④ SUBTERRANEAN EMITTER BOX:
RAIN BIRD SEB 7XB
- ⑤ SIX OUTLET MANIFOLD:
RAIN BIRD EMT-6XERI
- ⑥ TOP OF MULCH
- ⑦ FINISH GRADE
- ⑧ PVC SCH 80 NIPPLE
(LENGTH AS REQUIRED)
- ⑨ PVC SCH 40 TEE OR ELL
- ⑩ PVC LATERAL PIPE
- ⑪ 3" MINIMUM DEPTH OF
3/4" WASHED GRAVEL

NOTES:

1. SHOULD THE EMITTER BECOME DISLODGED UNREGULATED FLOW WILL OCCUR.
2. THE 6 OUTLET MANIFOLD PROVIDES A CENTRALIZED WATER DISTRIBUTION CONNECTION FOR UP TO 6 EMISSION DEVICES.
THE FOLLOWING EMITTERS CAN BE INSERTED INTO THE 1/4" TUBING FROM THE EMT-6XERI:

RAIN BIRD XERI-BUG BARB X BARB EMITTERS:

XB-05PC 0.5 GPH XB-10PC 1.0 GPH XB-20PC 2.0 GPH

RAIN BIRD PC MODULE BARB X BARB EMITTERS:

PC-05 5 GPH PC-07 7 GPH PC-10 10 GPH
PC-12 12 GPH PC-18 18 GPH PC-24 24 GPH

**6 OUTLET MANIFOLD WITH EMITTER,
1/4" TUBING AND STAKE**

1-11-10

D

N.T.S.

OPTION 1A