


- ① PVC EXHAUST HEADER
- ② PVC SCH 40 TEE OR EL (TYPICAL)
- ③ FLUSH POINT (TYPICAL)
SEE RAIN BIRD DETAIL "XFD FLUSH POINT"
- ④ BARB X MALE FITTING:
RAIN BIRD XFF-MA FITTING (TYPICAL)
- ⑤ PERIMETER OF AREA
- ⑥ BARB X BARB INSERT TEE OR CROSS:
RAIN BIRD XFF-TEE OR
RAIN BIRD XFD-CROSS (TYPICAL)
- ⑦ PERIMETER DRIPLINE PIPE TO BE INSTALLED
2"-4" FROM PERIMETER OF AREA
- ⑧ ON-SURFACE DRIPLINE:
RAIN BIRD XF SERIES DRIPLINE (TYPICAL)
POTABLE: XFD DRIPLINE
NON-POTABLE: XFDP DRIPLINE
- ⑨ PVC SUPPLY MANIFOLD
- ⑩ PVC SUPPLY PIPE FROM RAIN BIRD CONTROL
ZONE KIT (SIZED TO MEET LATERAL FLOW
DEMAND)
- ⑪ TOTAL LENGTH OF SELECTED DRIPLINE SHOULD
NOT EXCEED LENGTH SHOWN IN TABLE
- ⑫ PVC SCH 40 RISER PIPE

NOTES:

1. DISTANCE BETWEEN LATERAL ROWS AND EMITTER SPACING TO BE BASED ON SOIL TYPE, PLANT MATERIALS AND CHANGES IN ELEVATION. SEE INSTALLATION SPECIFICATIONS ON RAIN BIRD WEB SITE (WWW.RAINBIRD.COM) FOR SUGGESTED SPACING.
2. LENGTH OF LONGEST DRIPLINE LATERAL SHOULD NOT EXCEED THE MAXIMUM SPACING SHOWN IN THE ACCOMPANYING TABLE.
3. WHEN USING 17MM INSERT FITTINGS WITH DESIGN PRESSURE OVER 50PSI, IT IS RECOMMENDED THAT STAINLESS STEEL CLAMPS BE INSTALLED ON EACH FITTING.

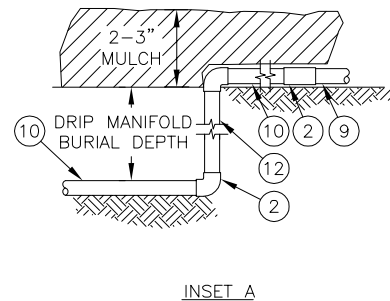

XFD Dripline Maximum Lateral Lengths (Feet)

Inlet Pressure psi	12" Spacing		18" Spacing		24" Spacing	
	Nominal Flow (gph)	Nominal Flow (gph)	Nominal Flow (gph)	Nominal Flow (gph)	Nominal Flow (gph)	Nominal Flow (gph)
15	0.6	0.9	0.6	0.9	0.6	0.9
20	273	155	314	250	424	322
30	318	169	353	294	508	368
40	360	230	413	350	586	414
50	395	255	465	402	652	474
60	417	285	528	420	720	488
60	460	290	596	455	780	514



XFD ON-SURFACE DRIPLINE

N.T.S.

IRREGULAR SHAPED LAYOUT

12-18-2012