



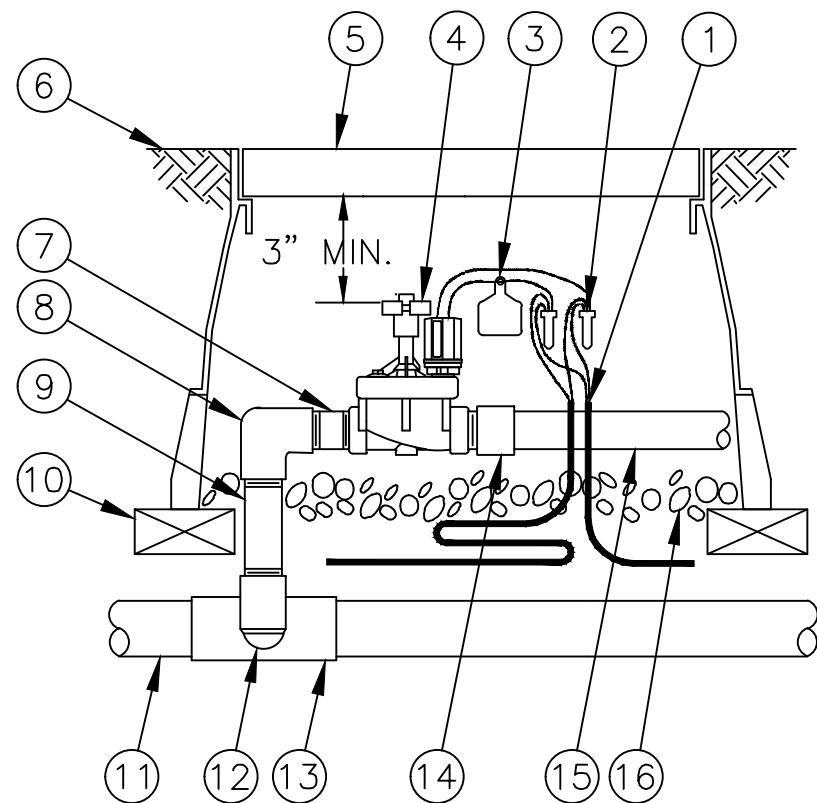

NOTE:
1. COIL AN ADDITIONAL 3- FEET OF TWO-WIRE
CABLE IN VALVE BOX FOR EASY SERVICING.

- ① TWO-WIRE CABLE
- ② WATERPROOF SPLICE CONNECTION RAIN BIRD WC20 (TWO REQUIRED)
- ③ ID TAG
- ④ REMOTE CONTROL VALVE: RAIN BIRD PEB/PESB/PESB-R WITH IVM-SOL
- ⑤ VALVE BOX WITH COVER: RAIN BIRD VB-STD
- ⑥ FINISH GRADE/TOP OF MULCH
- ⑦ PVC SCH 80 CLOSE NIPPLE
- ⑧ PVC SCH 80 ELL
- ⑨ PVC SCH 80 NIPPLE (LENGTH AS REQUIRED)
- ⑩ BRICK (1 OF 4)
- ⑪ PVC MAINLINE PIPE
- ⑫ SCH 80 NIPPLE (2-INCH LENGTH, HIDDEN) AND SCH 80 ELL
- ⑬ PVC SCH 80 TEE OR ELL
- ⑭ PVC SCH 40 MALE ADAPTER
- ⑮ PVC LATERAL PIPE
- ⑯ 3-INCH MINIMUM DEPTH OF 3/4-INCH WASHED GRAVEL



ELECTRIC REMOTE-CONTROL VALVE

N.T.S.

PEB OR PESB SERIES WITH IVM-SOL